



CorePro LED PLS



CorePro LED PLS 3.5W 840 2P G23

The Philips CorePro LED PLS integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamplung in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environment-friendly.

Product data

General Information		Starting Time (Nom)	
Cap-Base	G23		0.5 s
Nominal lifetime	30,000 hour(s)	Warm-up time to 60% light	0.5 s
Switching Cycle	50,000	Power Factor (Fraction)	0.9
Lighting Technology	LED	Voltage (Nom)	220-240 V
Flux measurement reference	Sphere	Ballast Compatibility	EM/Mains
		LED alternative to fluorescent lamp power	7 W
		Inrush current at mains	6.6
		Max. lamp no. on MCB B type 10A - Mains	116
		Max. lamp no. on MCB B type 10A – EM ballast	500
		without Compensation Capacitor.	
		Max. lamp no. on MCB B type 10A – EM ballast	-
		with Compensation Capacitor.	
		Max. lamp no. on MCB B type 16A - Mains	186
		Max. lamp no. on MCB B type 16A – EM ballast	801
		without Compensation Capacitor.	
		Max. lamp no. on MCB B type 16A – EM ballast	-
		with Compensation Capacitor.	
Light Technical		Temperature	
Color Code	840 [CCT of 4000K]	T-Case Maximum (Nom)	45 °C
Beam Angle (Nom)	120 degree(s)		
Luminous Flux	390 lm		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	111 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	82		
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Photobiological safety according to EN 62471	RGO		
Operating and Electrical			
Input Frequency	50 to 60 Hz		
Power Consumption	3.5 W		
Lamp Current (Nom)	22 mA		

CorePro LED PLS

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	115 mm
Bulb Shape	PL-S
Net Weight (Piece)	0.038 kg

Approval and Application

Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1820626
CE mark	Yes


EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1

Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C

Product Data



Order product name	CorePro LED PLS 3.5W 840 2P G23
Full product name	CorePro LED PLS 3.5W 840 2P G23
Full product code	872016928656600
Order code	929003756702
Material Nr. (12NC)	929003756702
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169286566
Numerator - Packs per outer box	20
EAN/UPC - Case	8720169286573

Dimensional drawing

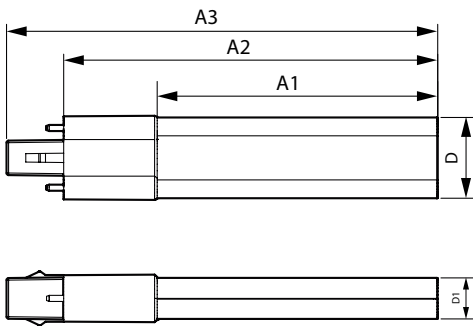

Product	D1	D	A1	A2	A3
CorePro LED PLS 3.5W 840 2P G23	16 mm	31 mm	79 mm	115 mm	137 mm

Photometric data

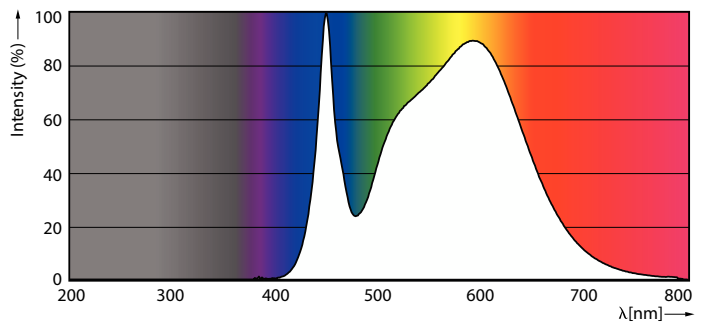


General uniform lighting - CorePro LED PLS 3.5W 840 2P G23

Spectral Power Distribution Colour - CorePro LED PLS 3.5W 840 2P G23


CorePro LED PLS

Photometric data




Light Distribution Diagram - CorePro LED PLS 3.5W 840 2P G23


Lifetime

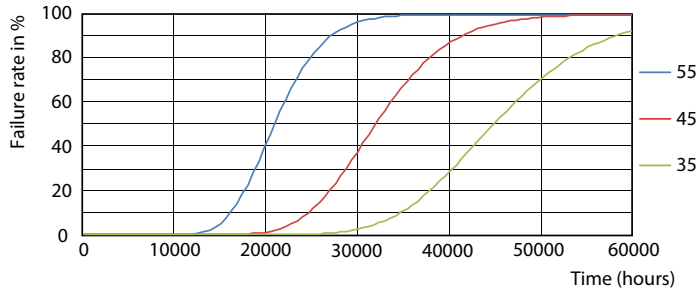


FailureRate

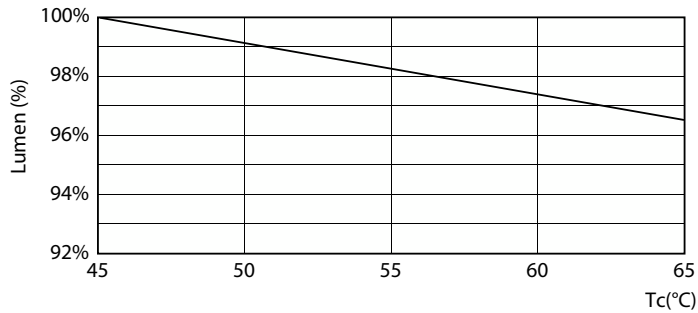

Lumen Maintenance Diagram - CorePro LED PLS 3.5W 840 2P G23

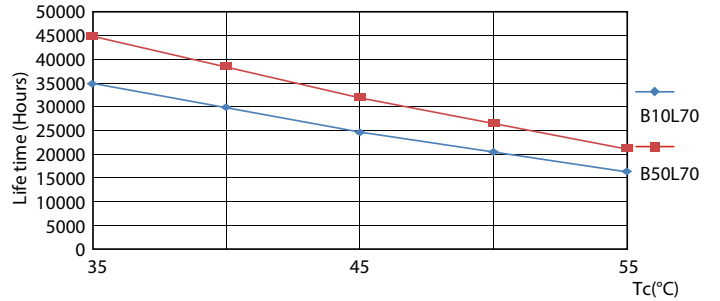


LifetimeVsTc

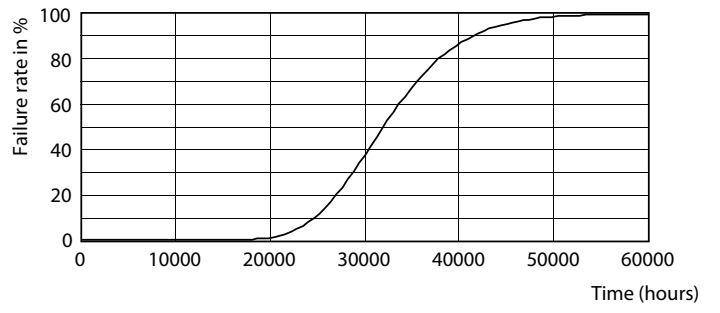

Life Expectancy Diagram

CorePro LED PLS

Lifetime

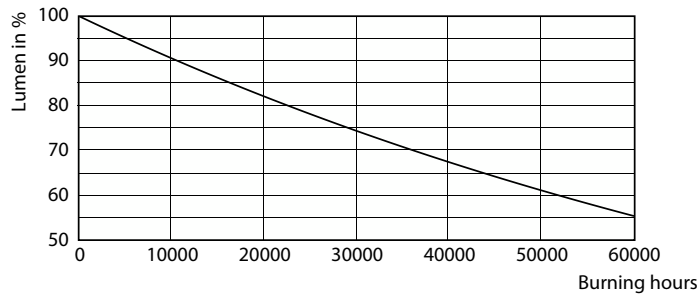

Lumen Maintenance Diagram - CorePro LED PLS 3.5W 840 2P G23

