



CorePro – LED HID SON-T



TForce Core LED road 17W 740 E27 MV

The Philips CorePro LED HID SON-T lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. This new generation of products brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant saving with a low initial investment. Furthermore, they're designed to have the same lamp size and light distribution as other HID lamps, so you will never know the difference. All thanks to our HighPower LED filament technology. Plus, its unique IP65 design means it can be used for outdoor applications

Warnings and Safety

- Please refer to the installation guide or consult a Philips Lighting representative for the wiring diagram and instructions.

Product data

General Information			
Cap-Base	E27	Luminous Efficacy (rated) (Nom)	176 lm/W
Nominal lifetime	25,000 hour(s)	Color Consistency	<6
Switching Cycle	50,000	Color rendering index (CRI)	70
Lighting Technology	LED	LLMF At End Of Nominal Lifetime (Nom)	70 %
Flux measurement reference	Sphere	Photobiological safety according to EN 62471	RG1
Warranty period	3 years	Operating and Electrical	
Light Technical		Line Frequency	50 to 60 Hz
Color Code	740 [CCT of 4000K]	Input Frequency	50 to 60 Hz
Beam Angle (Nom)	330 degree(s)	Power Consumption	17 W
Luminous Flux	3,000 lm	Lamp Current (Nom)	125 mA
Color Designation	Cool White (CW)	Starting Time (Nom)	0.5 s
Correlated Color Temperature (Nom)	4000 K	Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.5

CorePro - LED HID SON-T

Voltage (Nom)	220-240 V
Inrush current at mains	4.51
Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	100
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	-
Wattage Equivalent (LED HID only)	SON-T 50W
Ballast Compatibility	Mains only

Temperature

T-Case Maximum (Nom)	36.8 °C
----------------------	---------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	T38
Net Weight (Piece)	0.077 kg

Approval and Application

Energy Efficiency Class	C
-------------------------	---

Energy Saving Product	Yes
Energy Consumption kWh/1000 h	17 kWh
EPREL Registration Number	2329498
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	3.3
Ambient temperature range	-30 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data

Order product name	TForce Core LED road 17W 740 E27 MV
Full product name	TForce Core LED road 17W 740 E27 MV
Full product code	871951431627000
Order code	929002484902
Material Nr. (12NC)	929002484902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514316270
Numerator - Packs per outer box	6
EAN/UPC - Case	8719514316287



Dimensional drawing



Product	D	C
TForce Core LED road 17W 740 E27 MV	38.5 mm	168 mm


CorePro - LED HID SON-T

Photometric data

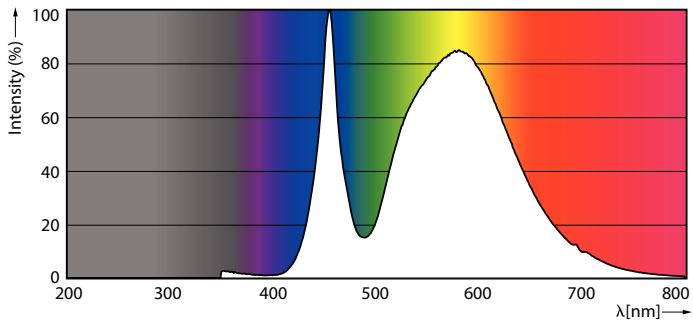


Spectral Power Distribution Colour - TForce Core LED road 17W 740 E27 MV

General uniform lighting - TForce Core LED road 17W 740 E27 MV




Light Distribution Diagram - TForce Core LED road 17W 740 E27 MV

Lifetime

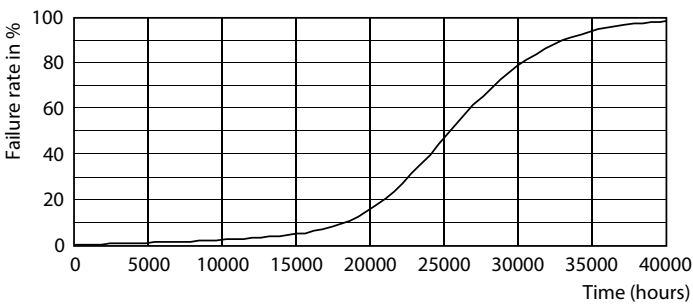

Life Expectancy Diagram

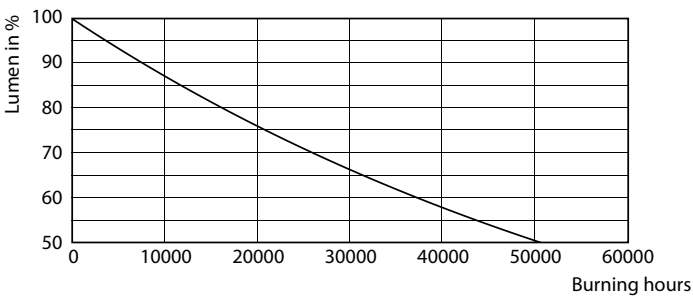

Lumen Maintenance Diagram - TForce Core LED road 17W 740 E27 MV

