

10 Office & Kitchen>Suspended Up/Down UGR19

38012A/W/V



40W CCT Variable 30x120cm LED suspended downlight + uplight panel.

55% downwards emission / 45% upwards emission.

Aluminium body with PMMA diffuser.

Complete with ceiling mounted driver-box including non-dimmable driver and 2m suspension kit.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

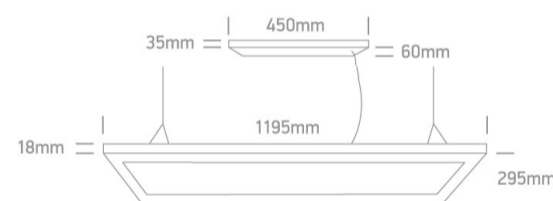

Gallery



Related items





89050LL


Physical Specification

Item Group	10 Office & Kitchen
Family	Suspended Up/Down UGR19
Order Code	38012A/W/V
Colour	White
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular
Length	1195mm
Width	295mm
Height	18mm
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No


Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Light Source	LED built in

LED Type	SMD
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Output	1050mA
Safety Class	
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	4000lm
Light Efficiency	100lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Box Weight	3.800kg
Pcs/Carton	4
Barcode	5291889083184
HS Code	9405119090

Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

